



Datasheet
E48 Series: 48 Amp
Wall/Pedestal Mounted
Single Gun Level 2 Smart EV Charger

Elocity E48 Series

Wall Mount



Plug-In Model



Hard-wired Model



Front View




Side View




Top View

Pedestal Mount


Dimensions




Top View

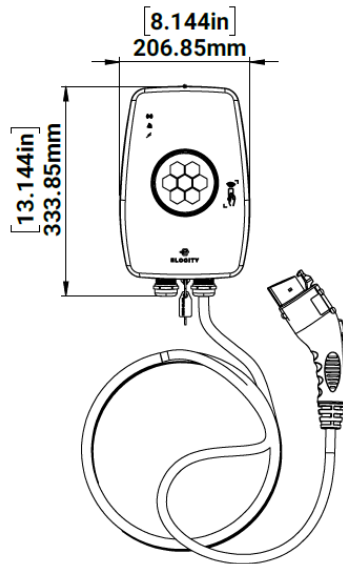


Front View

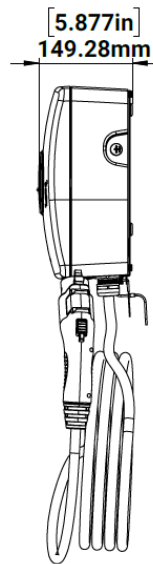


Side View

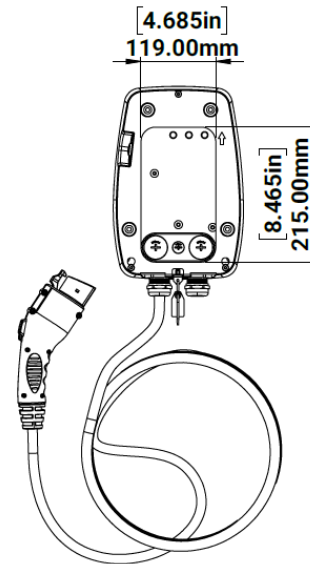


Rear View

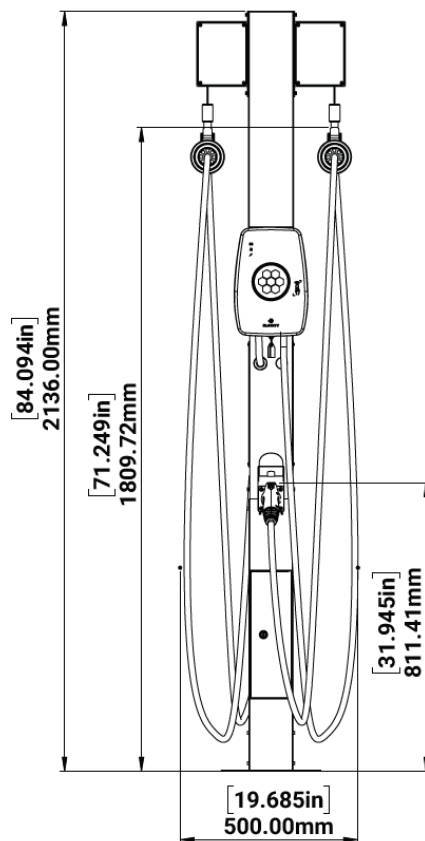

Front View

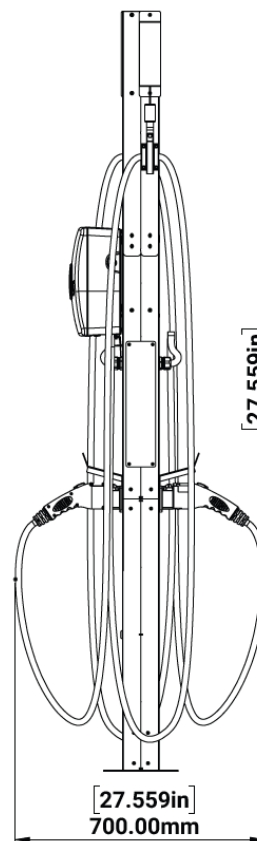

Side View



Top View

Features

Feature	Description
Power, Current, and Voltage Rating	Adjustable up to 11.6 KW (Manual selection switch to configure to 8 Amps/16 Amps/24 Amps/32 Amps /40 Amps /48 Amps, 208 V/240 V (Split Phase) AC (+/- 20%).
IP Rating	IP65 (Outdoor and Indoor rated).
Required Service Panel	Dedicated Dual Pole rated for 125% of maximum load
Breaker	(ex: 60A breaker for 48A output)
Electrical and Safety Protections	Inbuilt ground fault, surge, and overload protections.
Protocols and Communications Standards	OCPP 1.6 J.
Load & Power Management	Open and interoperable demand management, load management, power sharing and power management.
Power Sharing	Software configurable remote switching and power sharing from 0% to 100%.
Communication Channels	Multiple options such as Wi-Fi, cellular, Bluetooth, and Ethernet.
Metering	Embedded Class 1.0 electricity meter, other metering options such as ANSI and Measurement Canada certified meters are available*.
	Real-time power, voltage, and current.
	Time series data for real-time, daily, weekly, and monthly billing and monitoring.
Data Retention and Storage	90 days historical local storage on a rolling basis to prevent loss of data, peer to peer communication, data is strictly stored in Canada.
System Updates	Over the air.
Charging Cable Type	SAEJ1772 plug type 1 with 5/7 meters cable.
Display	TFT LCD, Size: 36.72 (Height) x 48.96 (Width) mm, Resolution: 320 (Height) x 240 (Width) RGB

* This feature is available for customization.

Specifications

Electrical	Supply Voltage	208 V/240 V AC, (+/-) 20%, 50/60 Hz.
	Wiring Connection	Split phase or 3 phase.
	Rated Current (A)	Up to 48 Amps.
	Vehicle Connection	Default J1772, optional NACS*.
	Ground Fault Protection	Limit of 20mA leakage current.
	Over Voltage Protection	Configurable.
	Over Current Protection	Configurable.
	Electricity Metering	Embedded Class 1.0 electricity meter, other metering options such as ANSI and Measurement Canada certified meters are available. *
	Safety	Inbuilt ground fault, surge, and overload protections.
	Charging Cable	Default 5 meters (16.4 Feet); 7 meters (23 Feet) or more is available on request*.
	NEMA Plug Type (Optional)	NEMA 6-50/NEMA 14-50.
Communications	Connectivity	Default - Wi-Fi (2.4 GHz) and Bluetooth Optional - Cellular/ Ethernet.
	Application Protocol	OCPP 1.6 J.
	Authentication	Default - RFID and Mobile App.
	LED Visual Indicators	Health diagnostics, network health, charger and charging status.
Smart Management Features	Load and Power Management	Software-based configurable load management, power sharing with/without network.
	Firmware Upgrades Over the Air.	Over the Air.
	Monitoring and Billing	Real-time power, voltage, current, time series data for real-time, daily, weekly, monthly EV charging billing.
	Smart Connectivity	Peer to peer communication.
	Local Data Storage	Up to 90 days historical local storage on a rolling basis to prevent loss of data.
	Data Security and Protection	Data remains within Canada. Highly secure WebSocket connections ensure no leakage of data.
	Smart monitoring	Cloud connected and able to perform full operations in absence of network.
Mechanical	Operating Temperature	-30°C to 50°C (-22°F to 122°F) ambient
	Storage Temperature	-40°C to 60°C (-40°F to 140°F) ambient
	Material	Polycarbonate or ABS+PC Blend.
	Enclosure Rating	NEMA 4, IP65 (Outdoor and Indoor rated).
Compliance	EMC	Federal Communications Commission ('FCC') part 15 Class A/B, Industry Canada.

* This feature is available for customization.

Product Model Selector

Feature / Model	EVSE E48 Pro	EVSE E48 Advance	EVSE 48 Ultimate
Charging Level	Level 2 AC, 48A (11.6kW)	Level 2 AC, 48A (11.6kW)	Level 2 AC, 48A (11.6kW)
Charger Cable Length	5 Meters or 7 Meters	5 Meters or 7 Meters	5 Meters or 7 Meters
Connection Options	NEMA 6-50/14-50 or HW	NEMA 6-50/14-50 or HW	NEMA 6-50/14-50 or HW
OCPD Compliance	✓	✓	✓
Embedded Metering	✓	✓	✓
Wi-Fi / Bluetooth	✓	✓	✓
Ethernet	✓	✓	✓
Cellular (4G)	✗	✓ (Optional)	✓ (Optional)
RFID Support	✓	✓	✓
LCD Display	✓	✓	✓
Measurement Canada Certified Meter	✗	✗	✓

Our Locations



NORTH AMERICA

Toronto, Canada
Elocity Technologies Inc.
23A-156 Duncan Mill Rd
North York ON M3B 3N2
Phone: +1(416) 384-1919

Vancouver, Canada
1680 Broadway St Unit 101, Port
Coquitlam,
BC V3C 2M8

Dallas, USA
3401 Olympus Blvd, Suite 500
Dallas, TX 75019, USA
Phone: +1-416-474-4670

EUROPE

Madrid, Spain
C/Menorca, 6, 3C
Alocobendas, Madrid
Phone: +34-648-132-879

ASIA-PACIFIC

Bangalore, India
JP-2301, Third floor, Block No. II
Tower -B. Ardent Office One,
Hoodi Circle, ITPL. Bangalore,
Karnataka-560048
Phone: +91 7022268973

Udaipur, India
City Shine Complex, 2nd floor,
4 Gokul Pura, University Main
Road, Udaipur, Rajasthan, 313001
Phone: +91 9057239009

MIDDLE EAST AND AFRICA

Dubai, UAE
Golden, Sands 9
AI Mankhool, Dubai
Phone: +97-150-879-4862

Copyright

Copyright © 2025 Elocity Technologies

The Elocity™ and its documentation are protected by copyright law and international treaties. Unauthorized reproduction or distribution of this program, or any portion of it, without prior consent in writing from Elocity Technologies, may result in severe civil and criminal penalties and prosecution to the maximum extent possible under the law.

Disclaimer and Restrictions

The material in this publication is for information only and is subject to change without notice. This material does not constitute a commitment on the part of Elocity Technologies. Every effort has been made to ensure the accuracy of this manual. However, the information in this document is subject to change without notice. Elocity Technologies gives no warranty with respect to this documentation and disclaims any implied warranties of merchantability and fitness for a particular purpose. Elocity Technologies shall not be liable for any errors or for incidental or consequential damages in connection with the furnishing, performance, or use of this manual or the examples herein.

Trademarks

Elocity™ is a trademark of Elocity Technologies. The copyrights, trademarks, and registered trademarks of other products mentioned in this document reside with their respective manufacturers.

Contact Us

Elocity™ is committed to continually improve its products and services through customer experience. Hence, your feedback is important to us. Please send us your feedback or other comments to support@elocitytech.com.



Connect@elocitytech.com



Made in CANADA



support@elocitytech.com